

CABLE TIES // STANDARD //

STANDARD CABLE TIES



The standard cable ties are produced exclusively in Polyamide 6.6 to avoid problems with separation of material (e.g., metals) during recycling or interference with electronic equipment.

The black cable ties are added with carbon black that gives an UV resistance for outside applications.

TECHNICAL DATA

Raw material:	polyamide 6.6.
Halogen-free:	
Humidity absorption:	2,7% (50% relative humidity).
Working temperature:	-40°C ÷ 85°C.
Installation temperature:	-10°C ÷ 60°C.
Flammability rating:	UL 94 class V2.
Resistance to external agents:	high resistance to aromatic solvents, oils, greases, oil derivatives, good resistance to bases, limited resistance to acids; not resistant to phenols and to chloride solvents.

APPROVALS/CERTIFICATIONS

Compliant with norm CEI EN 62275.




Halogen free

APPLICATIONS

- Electrical installations.
- Industrial wiring.
- Automotive.
- Panel building.

BENEFITS

- Bent rounded tip for an easier insertion through the head of the cable ties.
- Rounded edges for the safest application.
- Low friction coefficient of the material.

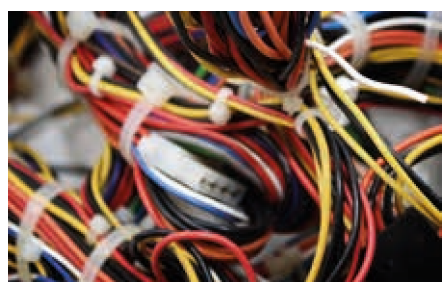

LINKED PRODUCTS:

Tools for cable ties, see pages 88

